

## KEY FEATURES

- Switching Power Module for PCB Mountable
- 4000VAC Input to Output 2MOPP Insulation
- Cooling by Free Air Convection
- High Efficiency up to 90%
- With P.F.C. Function >0.9
- <0.3W No Load Input Power
- EMI for Both Class I (with FG) and Class II (without FG) Configuration
- Suitable for BF Application with Appropriate System Consideration
- UL / IEC / EN 60601 3.1 Edition & UL / IEC / EN 60950 AM2 Safety Approvals
- 3-Year Product Warranty



(In Progress) (In Progress)

## ELECTRICAL SPECIFICATIONS

All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	MQCS100-12S	MQCS100-24S	MQCS100-48S	
Max Output Wattage (W)	80 W	100 W		
Input	Voltage (Note 3)	90-264 VAC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	< 2.0 A max. (115 VAC) / < 1.0 A max. (230 VAC)		
	Inrush Current (<2ms)	< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Leakage Current	< 0.1mA / 264 VAC (Touch Current)		
	Power Factor	PF>0.97 (115 VAC) / PF>0.9 (230 VAC) at Full Load		
Output	Voltage (V.DC.)	12V	24V	48V
	Voltage Accuracy	±2%		
	Current (A) max	6.666	4.167	2.083
	Line Regulation	±1%		
	Load Regulation (10-100%)	±1%		
	Minimum Load	0%		
	Maximum Capacitive Load	3000µF	1500µF	500µF
	Ripple & Noise (max.) (Note 1)	160mV	1% Vout	
	Efficiency (at 230VAC)	90%	90%	90%
Hold-up Time (at 115 VAC) (Note 2)	10 ms min.			
Protection	Over Power Protection	Auto recovery, Hiccup mode		
	Over Voltage Protection	Auto recovery, Hiccup mode		
	Overt Temperature Protection	Latch off		
	Short Circuit Protection	Auto recovery, Hiccup mode		
Isolation	Input-Output	4000VAC or 5656VDC		
	Input-FG	2000VAC or 2828VDC		
	Output-FG	1500VAC or 2121VDC		
Environment	Operating Temperature	-30°C...+70°C (with derating)		
	Storage Temperature	-30°C...+85°C		
	Temperature Coefficient	±0.05%/°C		
	Altitude During Operation	5000m		
	Humidity	95% RH		
	Atmospheric Pressure	70 kPa to 106 kPa		
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
Vibration	10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes.			

## ELECTRICAL SPECIFICATIONS

All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.



Model No.		MQCS100-12S	MQCS100-24S	MQCS100-48S
Physical	Dimension (L x W x H)	3.3 x 2.3 x 1.38 Inches ( 83.9 x 58.5 x 35.0 mm ) Tolerance ±0.5 mm		
	Weight	In Progress		
	Cooling Method	Free convection		
Safety	Approval	UL / IEC / EN 60601 3.1 <sup>rd</sup> Edition & UL / IEC / EN 60950 AM2		
EMC	Conducted and radiated EMI (Note 4)	EN55032 Conducted & Radiated Class B		
	ESD	EN61000-4-2 air ± 8kV , Contact ± 4Kv (In Progress)		
	Radiated Immunity	EN61000-4-3 10V/m (In Progress)		
	Fast Transient	EN61000-4-4 ± 2kV (In Progress)		
	Surge	EN61000-4-5 ±1kV (In Progress)		
	Conducted Immunity	EN61000-4-6 10Vrms (In Progress)		
	PFMF	EN61000-4-8 30A/m (In Progress)		
	Dips	EN61000-4-11 30% 10ms (In Progress)		
	Interruption	EN61000-4-11 >95% 5000ms (In Progress)		


## NOTE

- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- Hold-up Time measured at 90% Vout.
- Please check the derating curve for more details.
- Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
- Please refer to our PDF file "AC-DC Application" on our website: [www.archcorp.com.tw](http://www.archcorp.com.tw)
- This product is not designed for use in critical life support systems, equipment used in hazardous environment, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.**

## DERATING

If the input voltage is below 99VAC, we can only use it under the environment of higher than -10 celsius degree

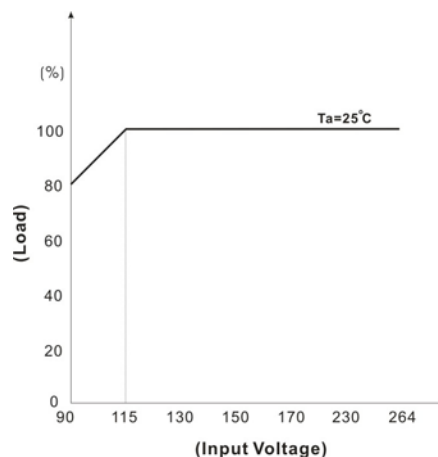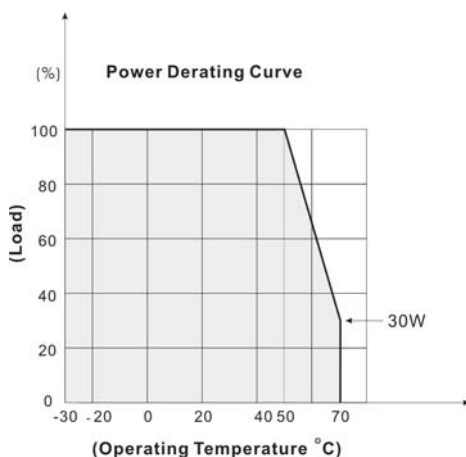

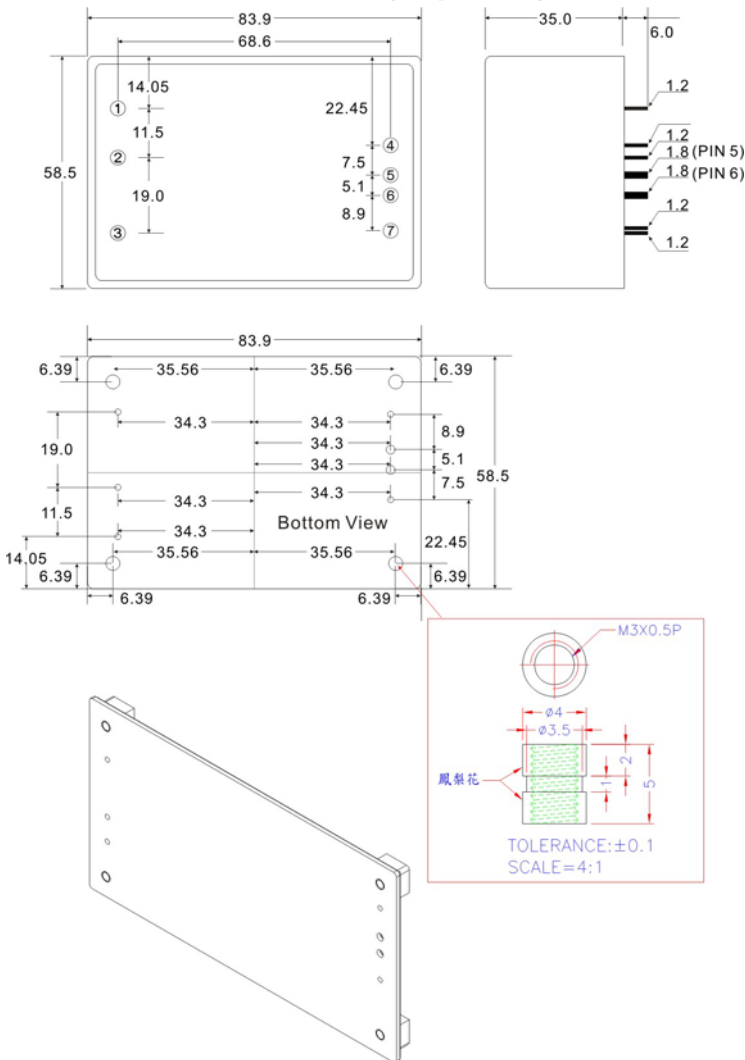
**MECHANICAL DIMENSION ( Top View )**


PIN#	Φ	Single
1	1.2±0.1mm	PE
2	1.2±0.1mm	AC IN (N)
3	1.2±0.1mm	AC IN (L)
4	1.2±0.1mm	ON / OFF (Provide +5Vdc Controlled)
5	1.8±0.1mm	+DC OUT
6	1.8±0.1mm	-DC OUT
7	1.2±0.1mm	Trim

**Remark:**

Please reserve the pin 4 hole on PCB.

If the remote on/off function is not required, please connect the pin 4 circuit layout with pin6, or keep pin 4 floating.

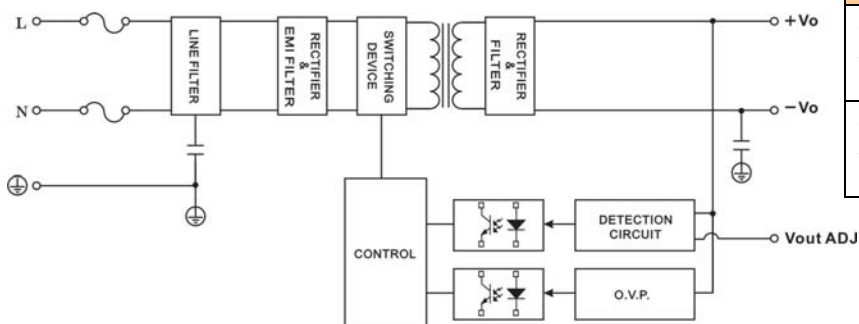**BLOCK DIAGRAM**

**TRIM**

	12S		24S		48S	
Trim → -V	+5%	0%	+5%	0%	+5%	0%
	32K Ω	~ 10M Ω	36K Ω	~ 10M Ω	33K Ω	~ 10M Ω
Trim → +V	0%	-5%	0%	-5%	0%	-5%
	10M Ω	~ 80K Ω	10M Ω	~ 205K Ω	10M Ω	~ 480K Ω